


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO YAMETER AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.



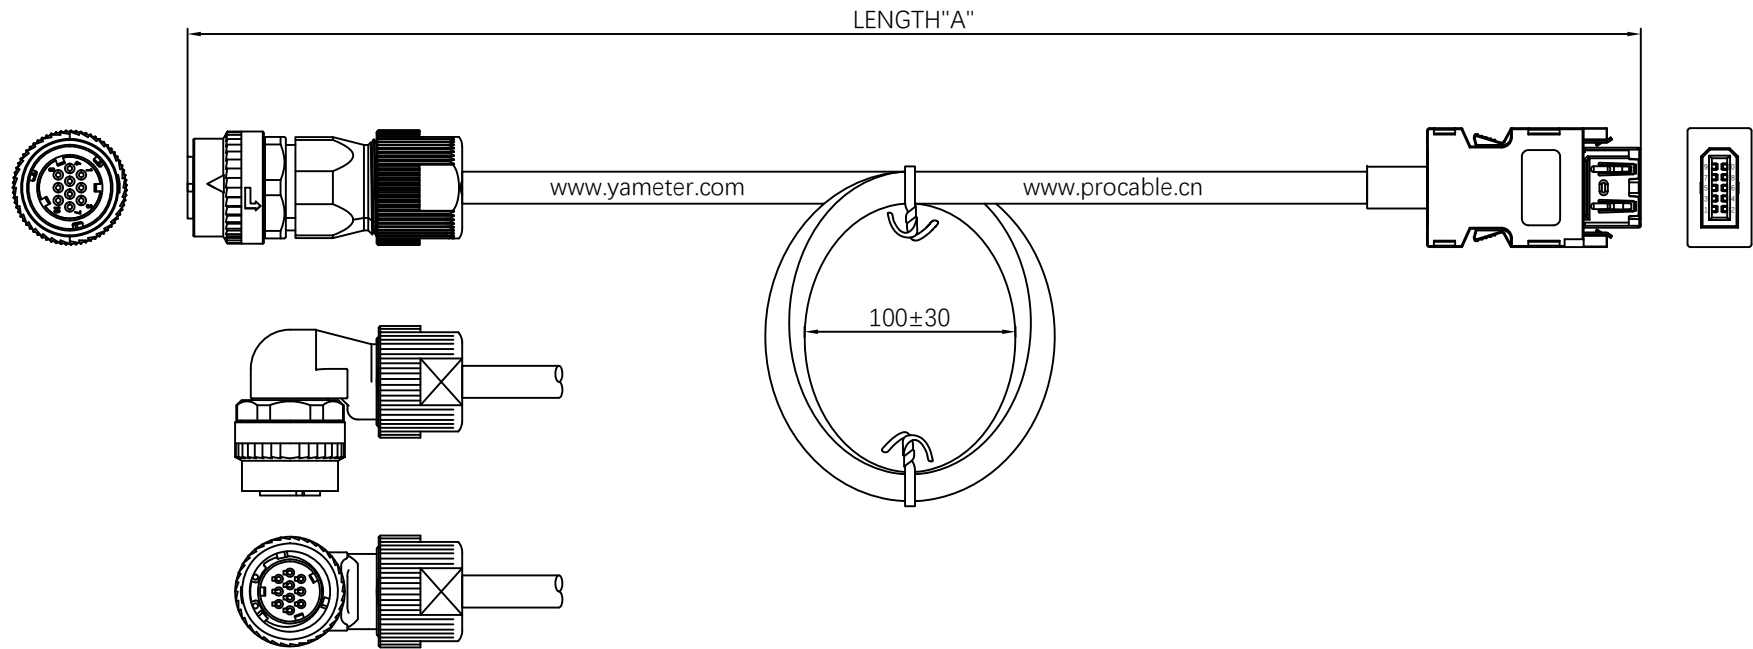


Material specifications  
Contact: Brass with gold plated  
Insulation: PA, Black, UL94V-0  
Housing: Brass with nickel plated

Mechanical properties  
Minimum bending radius: Fixed installation: 8x Cable OD  
Flexible installation: 10x Cable OD

Electrical testing of finished cable  
100% Open / Short / Miswiring testing  
Insulation resistance: DC300V 10MΩ  
Conductor resistance: 5Ω



UNMARKED TOLERANCES		TITLE		<div> Yameter</div> <div></div>				
DIMENSIONS	TOLERANCE							
x	±0.5	MITSUBISHI SERVO CODING CABLE ASSEMBLY		CUSTOMER PART NO.				
x.x	±0.25							
x.xx	±0.15							
0 to 500	+15 / -0	CUSTOMER	-	PART NUMBER		Mitsubishi-Servo-Cable	SIZE A3	REV A
> 501	+3W/-0 of length	DRAWN BY	MAY.YU	DRAWING NUMBER		Mitsubishi-Servo-Cable		
ANGLES		CHECKED BY	KIMKEE	APPROVED BY		TIGER.WANG	SHEET 1 OF 1	
x°	±1°	SCALE FREE		ALL DIMENSION UNIT IN MM				

