



THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO YAMETER AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

REV	ECN NO	DESCRIPTION	DATE	APPROVED						Customer drawing
A	-	NEW RELEASED	2020.07.28	MAY.YU						RoHS

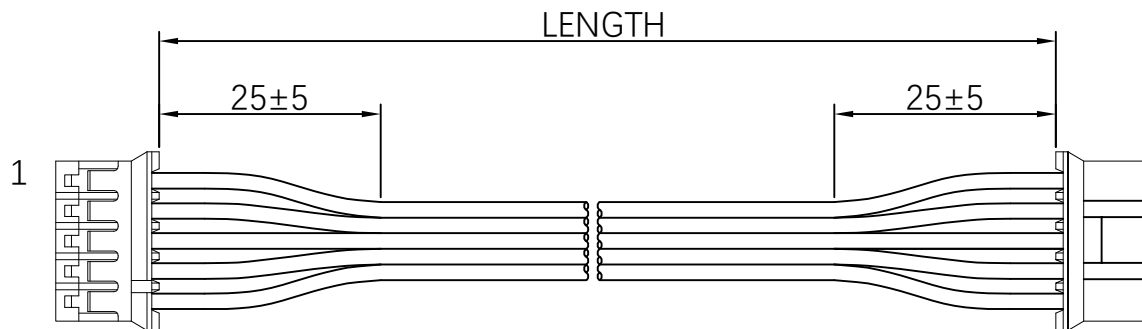

Material:

- . Housing: PA66,White,UL94V-0
- . Contact: Phosphor bronze, Tin-plated

Technical Data:

- . Rated Voltage: 125V AC,DC
- . Rated Current: 2A
- . Rated Temperature: -25°C~+85°C
- . Contact resistance: Initial value/10m Ωmax.
After environmental testing/20m Ωmax.
- . Insulation resistance: 1000M Ωmin.
- . Withstanding voltage: 800V AC/minute
- . Applicable Wire: 24AWG~30AWG
- . Matched with Contact: SPH-002T-P0.5S

UNMARKED TOLERANCES		TITLE 2~16PINS JST PHR PITCH2.0mm CONNECTOR TERMINAL WIRING HARNESS		 Yameter 			
DIMENSIONS	TOLERANCE						
x.	±0.5						
x.x	±0.25						
x.xx	±0.15						
0 to 500	+15 / -0	CUSTOMER	-	CUSTOMER PART NO.	-		
> 501	+3%/-0 of length	DRAWN BY	MAY.YU	PART NUMBER	harness-jst-phr	SIZE A4	REV A
ANGLES		CHECKED BY	BILL.LEE	DRAWING NUMBER	harness-jst-phr		
x°	±1°	APPROVED BY	TIGER.WANG	SCALE FREE	ALL DIMENSION UNIT IN MM		SHEET 1 OF 1

0 10 20 30 40 50 60 70 80 90 100 110 120