



REV	ECN NO	DESCRIPTION	DATE	APPROVED
A	-	NEW RELEASED	2022.01.05	MAY.YU

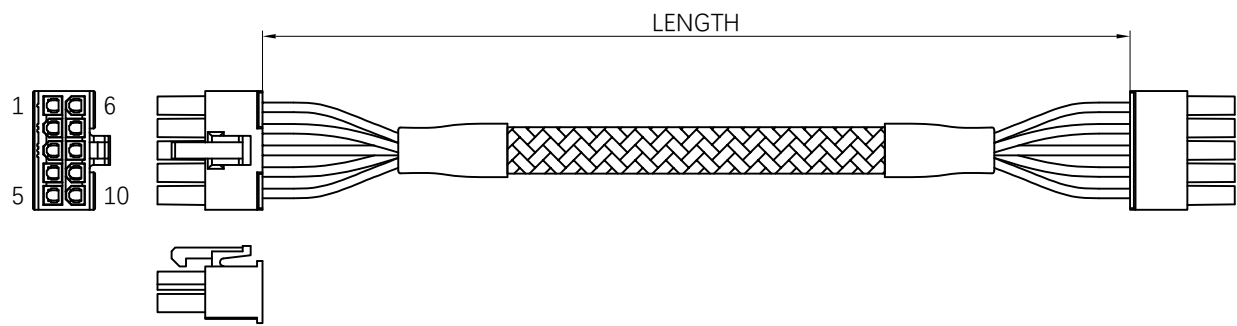

Material:  
. Housing: PA66,White,UL94V-2  
. Contact: Phosphor bronze or brass, Tin-plated

Technical Data:  
. Rated Voltage: 250V AC,DC  
. Rated Current: 7A  
. Rated Temperature: -25°C~+85°C  
. Contact resistance: Initial value/10m Ωmax.  
After environmental testing/20m Ωmax.  
. Insulation resistance: 1000M Ωmin.  
. Withstanding voltage: 1500V AC/minute  
. Applicable Wire: 18AWG~24AWG

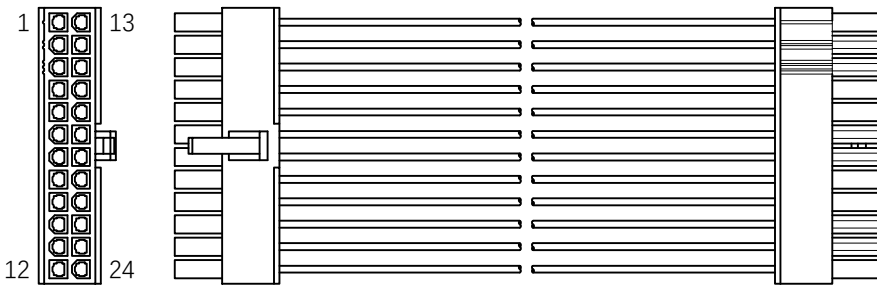

UNMARKED TOLERANCES		TITLE 2~24PINS DUAL ROW MINIFIT HOUSING TERMINAL WIRE HARNESS		Yameter			
DIMENSIONS	TOLERANCE						
x	±0.5	CUSTOMER	-	CUSTOMER PART NO.	-		
x.x	±0.25						
x.xx	±0.15	DRAWN BY	MAY.YU	PART NUMBER	harness-mini-fit	SIZE	REV
0 to 500	+15 / -0	CHECKED BY	BILL.LEE	DRAWING NUMBER	harness-mini-fit	A4	A
> 501	+3%/ -0 of length	APPROVED BY	TIGER.WANG	SCALE FREE	ALL DIMENSION UNIT IN MM	SHEET 1 OF 1	
ANGLES							
x°	±1°						

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO YAMETER AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

