


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO YAMETER AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

| | | | | | | | | | | | | | | | | | | | | | |
|-----|--------|---|--------------|---|--|---|--|------------|--|----------|--|-----------------|--|---|--|---|--|----|--|------------------|--|
| 1 | | 2 | | 3 | | 4 | | 5 | | 6 | | 7 | | 8 | | 9 | | 10 | | Customer drawing | |
| REV | ECN NO | | DESCRIPTION | | | | | DATE | | APPROVED | | <div>RoHS</div> | | | | | | | | | |
| A | - | | NEW RELEASED | | | | | 2022.01.05 | | MAY.YU | | | | | | | | | | | |

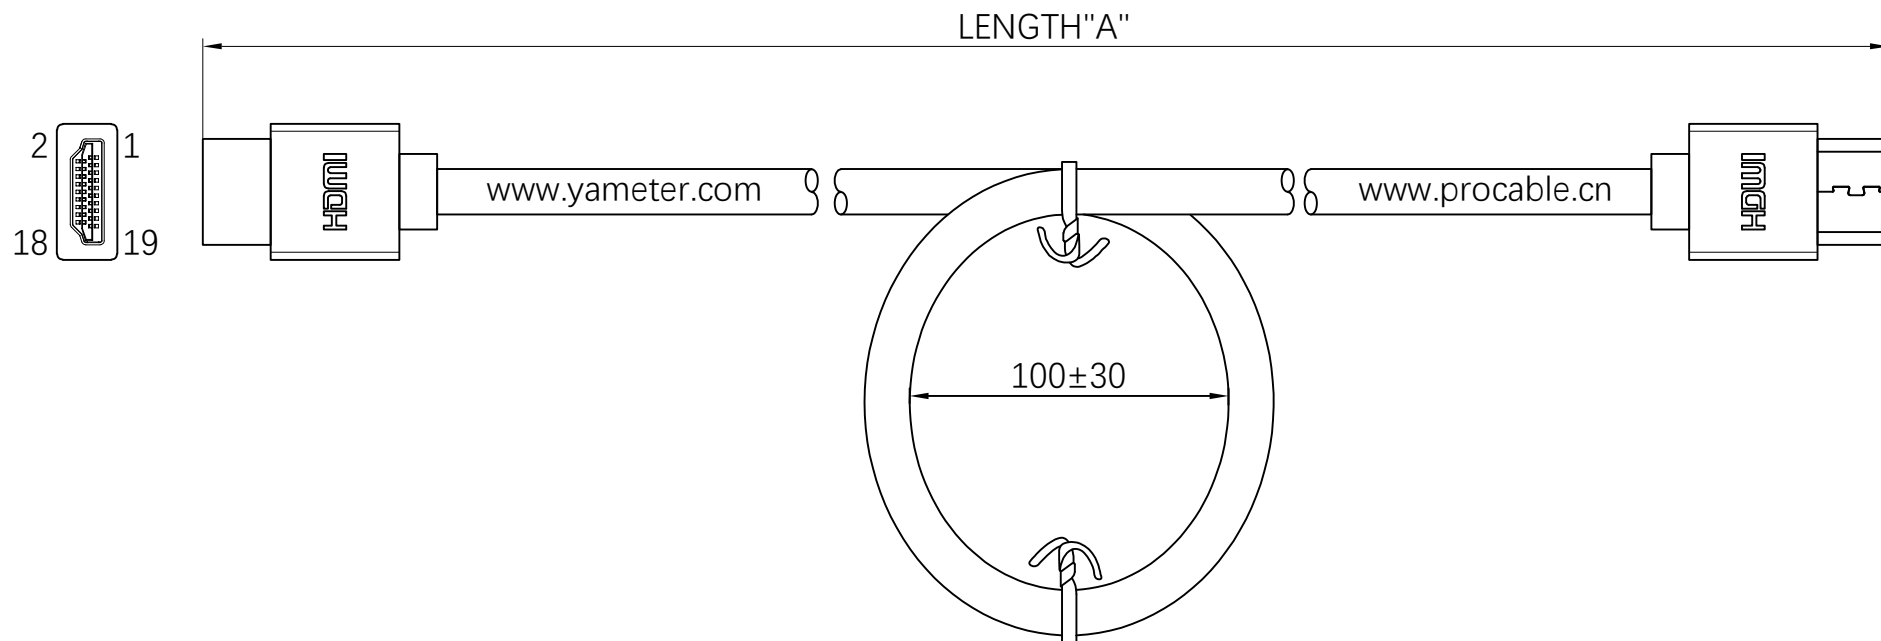

Material specifications

Cable: HDMI Cable

Connector: HDMI TYPE A Plug Connector

Overmolding: Black PVC or Aluminum alloy





Electrical testing of finished cable

100% Open / Short / Miswiring testing

Insulation resistance: DC300V 10MΩ

Conductor resistance: 5Ω



| UNMARKED TOLERANCES | | TITLE STANDARD HDMI CABLE | | <div> Yameter</div> | | |  | |
|---------------------|------------------|----------------------------------|------------|--|--------------------------|---|---|------|
| DIMENSIONS | TOLERANCE | | | | | | | |
| x. | ±0.5 | | | | | | | |
| x.x | ±0.25 | | | | | | | |
| x.xx | ±0.15 | | | | | | | |
| 0 to 500 | +15 / -0 | CUSTOMER | - | CUSTOMER PART NO. | - |  |  | |
| > 501 | +3%/-0 of length | DRAWN BY | MAY.YU | PART NUMBER | hdmi-cable | | | SIZE |
| ANGLES | | CHECKED BY | BILL.LEE | DRAWING NUMBER | hdmi-cable | A4 | A | |
| x° | ±1° | APPROVED BY | TIGER.WANG | SCALE FREE | ALL DIMENSION UNIT IN MM | | SHEET 1 OF 1 | |

0 10 20 30 40 50 60 70 80 90 100 110 120