


REV	ECN NO	DESCRIPTION	DATE	APPROVED
A	-	NEW RELEASED	2022.01.05	MAY.YU

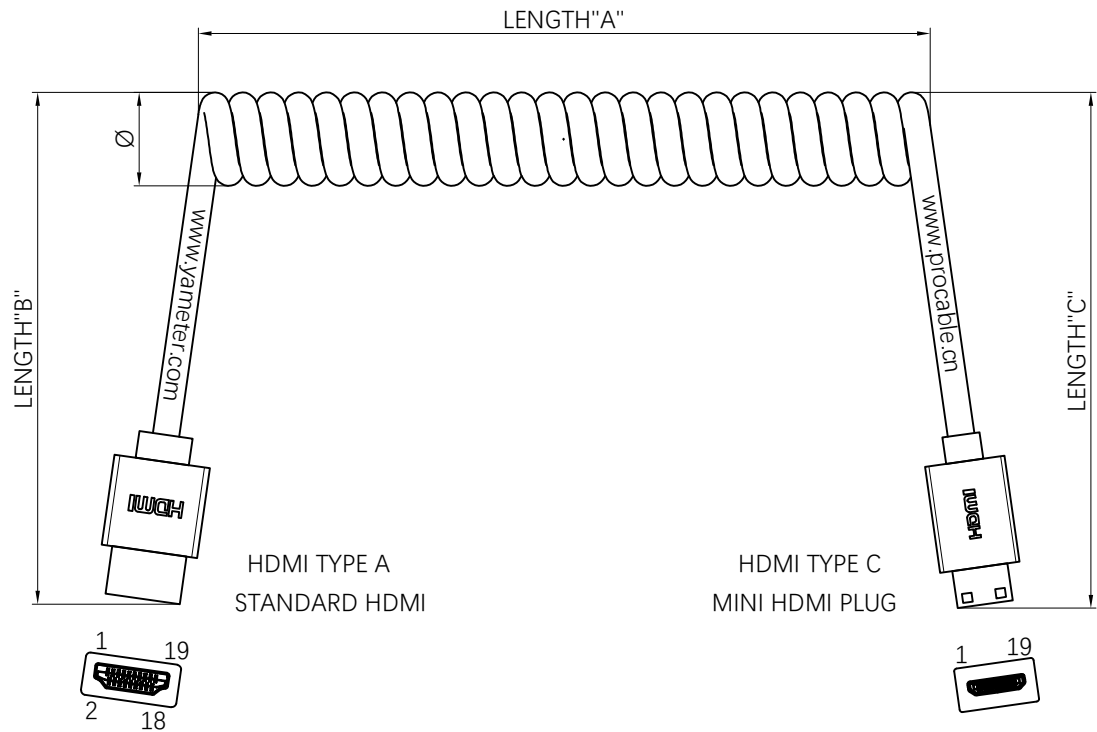

Electrical specifications:
Use of voltage range: 5V
Current range: 2A
Temperature range: -20°C~+80°C

Material specifications
Cable: HDMI Cable
Connector: HDMI-A/HDMI-C Connector
Overmolding: Black PVC

Mechanical properties
Minimum bending radius: Fixed installation: 8x Cable OD
Flexible installation: 10x Cable OD

Electrical testing of finished cable
100% Open / Short / Miswiring testing
Insulation resistance: DC300V 10MΩ
Conductor resistance: 5Ω



UNMARKED TOLERANCES		TITLE		Yameter				QR CODE	
DIMENSIONS	TOLERANCE	HDMI PRE-MOLDED SPRING CABLE ASSEMBLY							
x	±0.5	CUSTOMER		CUSTOMER PART NO.					
x.x	±0.25	DRAWN BY		PART NUMBER		SIZE			
x.xx	±0.15	CHECKED BY		DRAWING NUMBER		REV			
0 to 500	+15 / -0	APPROVED BY		SCALE FREE		ALL DIMENSION UNIT IN MM		SHEET 1 OF 1	
> 501	+3%/ -0 of length								
ANGLES									
x°	±1°								

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO YAMETER AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

