


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO YAMETER AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

	1	2	3	4	5	6	7	8	9	10	Customer drawing
REV	ECN NO	DESCRIPTION			DATE	APPROVED					
A	-	NEW RELEASED			2020.07.28	MAY.YU					

RoHS

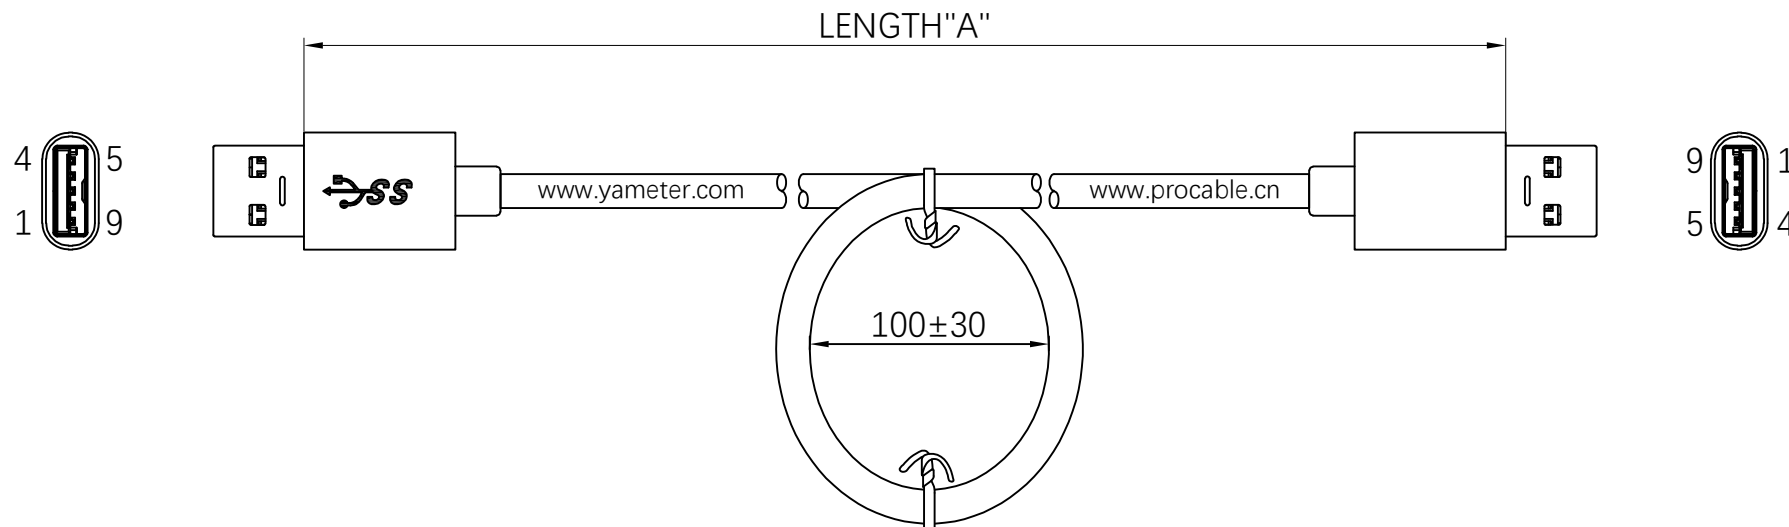

Electrical specifications:
Use of voltage range: 5V
Current range: 2A
Temperature range: -20°C~+80°C

Material specifications
Cable: USB3.0 Cable
Connector: USB3.0 Connector
Overmolding: Black PVC

Mechanical properties
Minimum bending radius: Fixed installation: 8x Cable OD
Flexible installation: 10x Cable OD

Electrical testing of finished cable
100% Open / Short / Miswiring testing
Insulation resistance: DC300V 10MΩ
Conductor resistance: 5Ω

UNMARKED TOLERANCES		TITLE STANDARD USB 3.0 CABLE ASSEMBLY		 Yameter 			
DIMENSIONS	TOLERANCE						
x.	±0.5						
x.x	±0.25						
x.xx	±0.15						
0 to 500	+15 / -0	CUSTOMER	-	CUSTOMER PART NO.	-	 	
> 501	+3%/-0 of length	DRAWN BY	MAY.YU	PART NUMBER	usb3.0cable	SIZE	REV
ANGLES		CHECKED BY	BILL.LEE	DRAWING NUMBER	usb3.0cable	A4	A
x°	±1°	APPROVED BY	TIGER.WANG	SCALE FREE	ALL DIMENSION UNIT IN MM		SHEET 1 OF 1

0 10 20 30 40 50 60 70 80 90 100 110 120